




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁶ : H04L 12/28, H04B 1/69</p>	<p>A1</p>	<p>(11) International Publication Number: WO 99/23790 (43) International Publication Date: 14 May 1999 (14.05.99)</p>
<p>(21) International Application Number: PCT/US98/22969 (22) International Filing Date: 29 October 1998 (29.10.98) (30) Priority Data: 08/962,908 3 November 1997 (03.11.97) US (71) Applicant: INTERMEC IP CORP. [US/US]; 360 North Crescent Drive, Beverly Hills, CA 90210-4867 (US). (72) Inventors: PALMER, Brian, G.; 16525 N.E. 135th Place, Redmond, WA 98052 (US). JOVANOVIĆ, Alan, F.; 22431 - 10th Avenue South, Des Moines, WA 98198 (US). (74) Agents: BERLINER, Brian, M. et al.; Graham & James LLP, 14th floor, 801 S. Figueroa Street, Los Angeles, CA 90017-5554 (US).</p>		<p>(81) Designated States: JP, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>

(54) Title: MULTI-MODE RADIO FREQUENCY NETWORK SYSTEM

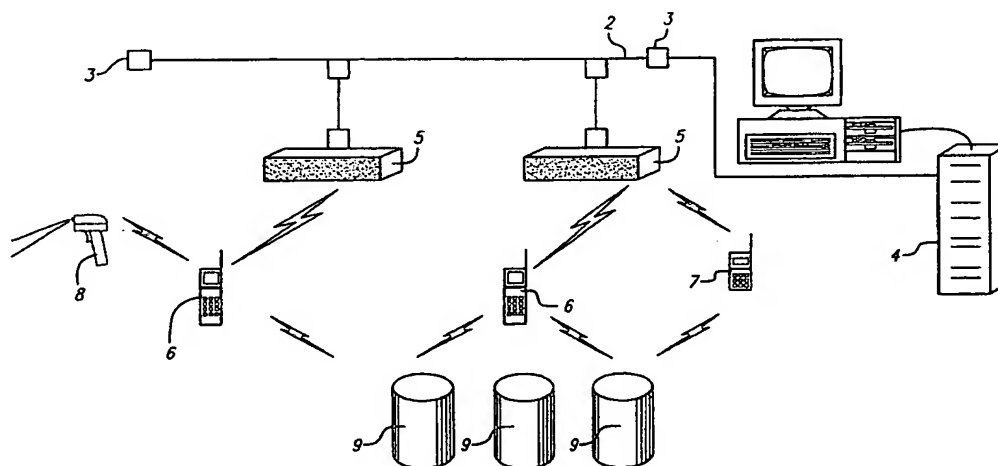

(57) Abstract

A multi-mode radio frequency network comprises a first type of computing device having a radio receiver/transmitter adapted for communication over a narrowband frequency range, and a second type of computing device having a radio receiver/transmitter adapted for communication over both the narrowband frequency range and a wideband frequency range. A network access controller is adapted for communication with both types of computing device over respective ones of the narrowband and wideband frequency ranges. The network access controller provides synchronization signals for coordinating the timing of communications over the narrowband and wideband frequency ranges. The second type of computing device may be adapted for either frequency-hopping or direct sequence spread spectrum communication signals over the wideband frequency range. The synchronization signals further comprise periodic beacon signals that define discrete time periods which further include a synchronous portion for communication of the narrowband signals and an asynchronous portion for communication of the wideband signal. The multi-mode radio frequency network may further include data storage/retrieval devices and data collection devices adapted for communication with the first and second types of computing device over the narrowband frequency range.

BEST AVAILABLE COPY

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

MULTI-MODE RADIO FREQUENCY NETWORK SYSTEM

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to computing devices coupled together into a wireless local area network, and more particularly, to a
5 wireless local area network infrastructure that permits communication in plural modes to support both wideband spread spectrum and narrowband radio frequency signals.

2. Description of Related Art

10 A wireless local area network (WLAN) comprises a plurality of remote computing devices which communicate together over radio frequency (RF) signals. As in a wired local area network (LAN), the WLAN allows users to seamlessly access disk drives, printers, and additional computer resources and systems connected to the WLAN. The remote
15 computing devices include a radio receiver/transmitter adapted for RF communication with the other elements of the WLAN. The WLAN may also include a central host processing unit that sends information to and receives information from any one of the plurality of remotely disposed computing devices. The central host processor may also form part of a separate wired
20 LAN to provide a bridge with the WLAN. In such a WLAN, the remote computing devices may comprise portable units that operate within a defined environment to report information back to the central host processing unit. WLAN systems offer increased flexibility over wired LAN systems by enabling operators of the remote computing devices substantial freedom of
25 movement through the environment, and are particularly useful for remote data collection applications such as inventory control, manufacturing and production flow management, and asset tracking.

For simplicity, the radio receiver/transmitter provided within each remote computing device may communicate using conventional narrowband RF signals. Narrowband RF operation has a significant drawback in that the radio receiver/transmitter must be operated at relatively low power levels in order to ensure compliance with certain governmental regulations, and at such low power levels the RF signals are highly susceptible to interference and have low data throughput rates. To overcome these and other drawbacks, commercial WLAN systems have adopted so-called "spread spectrum" modulation techniques. In a spread spectrum system, the transmitted signal is spread over a frequency band that is significantly wider than the minimum bandwidth required to transmit the information being sent. As a result of the signal spreading, spread spectrum systems enable high data integrity and security. Moreover, by spreading transmission power across a broad bandwidth, power levels at any given frequency within the bandwidth are significantly reduced, thereby reducing interference to other radio devices.

In one type of spread spectrum communication system, an RF carrier is shifted in discrete increments in a pattern dictated by a predetermined sequence. These spread spectrum systems are known as "frequency-hopping" modulation systems, since the transmitter jumps from frequency to frequency in accordance with the predetermined sequence. The information signal is modulated onto the shifting carrier frequencies using frequency shift keying (FSK) modulation. Another type of spread spectrum communication system utilizes an RF carrier modulated by a digital code sequence having a spreading code rate, or chipping rate, much higher than the clock rate of the information signal. These spread spectrum systems are known as "direct sequence" modulation systems. The RF carrier may be modulated such that a data stream has one phase when a spreading code sequence represents a data "one" and 180° phase shift when the spreading code sequence represents a data "zero." The RF carrier

may also be binary or quadrature modulated by one or more data streams such that the data streams have one phase when a spreading code sequence represents a data "one" and a predetermined phase shift (e.g., 180° for binary, and 90° for quadrature) when the spreading code sequence represents a data "zero." These types of modulation are commonly referred to as binary shift key (BPSK) and quadrature shift key (QPSK) modulation, respectively.

A primary drawback of operating a WLAN using spread spectrum communication is the high cost of the computing devices due primarily to the complexity of the radio receiver/transmitter. For certain applications, a narrowband RF radio receiver/transmitter would provide satisfactory performance while the high data throughput and integrity provided by a wideband spread spectrum radio receiver/transmitter would be unnecessary. Nevertheless, it would be costly and impractical to operate two separate narrowband and wideband WLAN systems simultaneously. As a result, WLAN system designers must select a single communication mode that provides a sufficient level of performance within practical cost parameters.

Thus, it would be highly desirable to provide a WLAN infrastructure that permits multi-mode communication over both wideband spread spectrum and narrowband RF signals. Such a multi-mode WLAN could be constructed using a combination of higher performance computing devices communicating using wideband spread spectrum RF signals and lower performance computing devices communicating using narrowband RF signals.

SUMMARY OF THE INVENTION

In accordance with the teachings of the present application, a multi-mode radio frequency network is provided. The multi-mode radio frequency network permits RF communication using both wideband spread

spectrum RF signals and narrowband RF signals.

More particularly, the multi-mode radio frequency network comprises a first type of computing device having a radio receiver/transmitter adapted for communication over a narrowband frequency range, and a
5 second type of computing device having a radio receiver/transmitter adapted for communication over both the narrowband frequency range and a wideband frequency range. A network access controller is adapted for communication with both types of computing device over respective ones of the narrowband and wideband frequency ranges. The network access
10 controller provides synchronization signals for coordinating the timing of communications over the narrowband and wideband frequency ranges. The second type of computing device may be adapted for either frequency-hopping or direct sequence spread spectrum communication signals over the wideband frequency range. The synchronization signals further
15 comprise periodic beacon signals that define discrete time periods which further include a synchronous portion for communication of the narrowband signals and an asynchronous portion for communication of the wideband signal. The multi-mode radio frequency network may further include data storage/retrieval devices and data collection devices adapted for
20 communication with the first and second types of computing device over the narrowband frequency range.

In a first embodiment of the invention, the second radio receiver/transmitter is adapted to receive frequency-hopping spread spectrum communication signals in addition to narrowband communication
25 signals. A receive section is adapted to receive radio frequency (RF) signals over the wideband and the narrowband frequency ranges and having a downconversion mixer to mix the RF signals with a frequency-shifted carrier signal to downconvert the RF signals to intermediate frequency (IF) signals. An IF filter section is adapted to receive the IF signals and has a wideband
30 bandpass filter and a narrowband bandpass filter that are alternatively

coupled to the IF signals to provide filtered IF signals. A demodulation section is adapted to receive the filtered IF signals and recover wideband and narrowband receive signals therefrom. A synthesizer section is adapted to generate the frequency-shifted carrier for the receive section. The
5 frequency-shifted carrier is further modulated by wideband and narrowband transmit data signals to provide modulated transmit signals, and a transmit section is adapted to transmit the modulated transmit signals.

In a second embodiment of the invention, the second radio receiver/transmitter is adapted to receive direct sequence spread spectrum
10 communication signals in addition to narrowband communication signals. A receive section is adapted to receive radio frequency (RF) signals and has a downconversion mixer to mix the RF signals with a carrier signal to downconvert the RF signals to intermediate frequency (IF) signals. A demodulation section receives the filtered IF signals and provides in-phase
15 and quadrature receive data signals therefrom. A synthesizer section generates the carrier for the receive section, and the carrier is further modulated by in-phase and quadrature transmit data signals. A transmit section transmit the modulated transmit signals. Lastly, a control section controls the switching between wideband and narrowband modes of the
20 second radio receiver/transmitter in which the in-phase and quadrature receive signals comprise wideband data in the wideband mode of the second radio receiver/transmitter, and the in-phase receive signals comprise narrowband data in the narrowband mode of the second radio receiver/transmitter.

25 A more complete understanding of the multi-mode radio frequency network will be afforded to those skilled in the art, as well as a realization of additional advantages and objects thereof, by a consideration of the following detailed description of the preferred embodiment. Reference will be made to the appended sheets of drawings which will first be
30 described briefly.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a system diagram illustrating a multi-mode WLAN of the present invention which includes a first type of computing device using wideband RF communication signals and second type of computing device using narrowband RF communication signals;

Fig. 2 is a block diagram illustrating a first embodiment of a multi-mode radio receiver/transmitter adapted for frequency-hopping spread spectrum communication;

Fig. 3 is a block diagram illustrating a second embodiment of a multi-mode radio receiver/transmitter adapted for direct sequence spread spectrum communication; and

Fig. 4 is a timing diagram illustrating synchronous and asynchronous communication periods following a periodic beacon.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

The present invention satisfies the need for a multi-mode WLAN infrastructure that supports both wideband spread spectrum and narrowband radio frequency signals. The multi-mode WLAN can be constructed using a combination of higher performance computing devices communicating using wideband spread spectrum RF signals and lower performance computing devices communicating using narrowband RF signals. In the detailed description that follows, it should be appreciated that like reference numerals are used to identify like elements illustrated in one or more of the figures.

Referring first to Fig. 1, a system diagram of a multi-mode WLAN of the present invention is illustrated. The multi-mode WLAN includes a wired medium 2 having a plurality of interconnected nodes 3. At one of the nodes 3, a central computer controller 4 is coupled thereto which acts as a server for the WLAN and controls communications between the nodes on

the wired medium 2. Two of the nodes 3 have access points 5 coupled thereto which permit communication between the wired medium 2 and the wireless computing devices of the WLAN that will be described in greater detail below. The access points 5 include an RF receiver/transmitter that communicates between the wired medium 2 and the wireless computing devices. As known in the art, information transmitted on the wired medium 2 may be in the form of data packets in accordance with well established computer network protocols, such as Ethernet or Token Ring. It should also be appreciated that other computer network elements, such as computers, servers, printers, and data storage devices may be coupled to other nodes 3 of the wired medium 2.

The WLAN further includes a multi-mode computing device 6, a single-mode computing device 7, data collection devices 8, and data storage/retrieval devices 9. The multi-mode computing device 6 comprises a multi-mode RF receiver/transmitter adapted to communicate both narrowband RF signals and wideband RF signals. The single-mode computing device 7 comprises a single-mode RF receiver/transmitter adapted to communicate only narrowband RF signals. Both the multi-mode and single-mode computing device 6, 7 have generally similar external features, such as a keypad, a data display, and an antenna; however, it is anticipated that the multi-mode computing device 6 be more sophisticated and have greater internal data processing capability than the single-mode computing device 7. For example, the multi-mode computing device 6 may include a faster central processing unit (CPU) and greater memory storage capacity than the single-mode computing device 7, and similarly, may have a larger or more complete keypad and/or data display. For these reasons, it is anticipated that the multi-mode computing device 6 be utilized by supervisory level users and the single-mode computing device 7 be utilized by ordinary level users.

The data collection devices 8 comprise conventional bar code readers used to convert information encoded in bar code symbols into electronic data signals. As known in the art, such data collection devices 8 typically include a light source adapted to be scanned across the bar code field, such as provided by a laser or light emitting diode (LED). The bar and space elements of the bar code symbol have different light reflectivity, and the information encoded into the bar code may thus be detected in the reflected light therefrom. Alternatively, the data collection devices 8 may collect an image of the bar code using an electro-optical imaging element, such as a charge coupled device (CCD), allowing the information encoded into the bar code symbol to be interpreted from the collected image. The data collection devices 8 are adapted to communicate with the computing devices 6, 7 via narrowband RF signals, or alternatively, may be directly coupled to the computing devices via an electrical cable.

The data storage/retrieval devices 9 comprise conventional magnetic disk or tape drives used for non-volatile data storage. The data storage/retrieval devices 9 are adapted to communicate with the computing devices 6, 7 via narrowband RF signals. Data collected by the computing devices 6, 7 may thus be downloaded to the data storage/retrieval devices 9 during the course of data collection operations, or alternatively, data stored in the data storage/retrieval devices may be accessed by the computing devices 6, 7. As a result, the data storage capacity of the computing devices 6, 7 can be reduced accordingly.

To operate the multi-mode WLAN, the access points 5 transmit periodic beacon signals that enable all the wireless elements of the WLAN to synchronize. As shown in Fig. 4, the periodic beacon signals (B) indicate the start of a time period during which RF communication will occur. This time period is divided into a synchronous communication period (S) and an asynchronous communication period (A). The synchronous communication period is further sub-divided into fixed-length time slots S_1 - S_6 which allow the

multi-mode computing device 6 to sequentially poll the data storage retrieval devices 9, the single-mode computing device 7, and the data collection devices 8 via narrowband RF communication signals. Also, the single-mode computing device 7 communicates with the access point 5 via narrowband RF communication signals during one of the time slots. It is anticipated that the synchronous RF communication signals be transmitted using a common system clock that is synchronized to the periodic beacon signals.

During the asynchronous communication period, the multi-mode computing devices 6 communicate with the access points 5 over wideband spread spectrum RF communication signals. The spread spectrum RF communication signals may be either of the frequency-hopping or direct sequence variety, as will be further described below. The asynchronous spread spectrum communication signals A_1 - A_2 do not have fixed time duration, but rather such signals are provided in the form of message packets that generally include a header identifying a start of a message and a trailer identifying an end of a message in accordance with known data protocols.

Referring now to Fig. 2, an embodiment of the multi-mode RF receiver/transmitter included in the multi-mode computing device 6 is illustrated. In accordance with this embodiment, the multi-mode RF receiver/transmitter is adapted to communicate both narrowband RF signals and wideband frequency-hopping spread spectrum RF signals. The multi-mode RF receiver/transmitter of Fig. 2 includes an RF receive section 10, an IF filter section 20, a demodulation section 30, a digital control section 40, a synthesizer section 50 and a transmit section 60.

The RF receive section 10 includes an antenna 12, a transmit/receive switch 14, a bandpass filter 15, low noise amplifier stages 16, 17, and a downconversion mixer 18. The antenna 12 is provided for receiving and transmitting RF signals to and from the receiver/transmitter. The transmit/receive switch 14 has a common terminal that is electrically

coupled to the antenna 12, and two contact positions electrically coupled to the bandpass filter 14 of the receive circuit and transmit circuit 60 (described below), respectively. The transmit/receive switch 14 enables the antenna 12 to be configured for either transmitting or receiving operations. As known in the art, the transmit/receive switch 14 can be provided by mechanical switch elements, such as a relay, or can comprise solid state switching circuitry. It is preferable that the transmit/receive switch 14 have generally high speed switching characteristics to reduce delays between respective receiving and transmitting operations. Within the receive section 10, a received RF signal is first provided to a bandpass filter 15 which rejects adjacent extraneous frequencies outside the bandwidth of the received signal. The low noise amplifier stages 16, 17 amplify the received and filtered signal to a desired amplitude level. The mixer 18 multiplies the amplified signal with a locally generated frequency-shifted carrier from the synthesizer section 50 to produce an intermediate frequency (IF) signal having a constant difference in frequency between the received signal and the locally generated signal.

In the IF filter section 20, the IF signal is provided to one of two bandpass filters depending on whether the received RF signal is a synchronous narrowband signal or an asynchronous wideband signal. The IF filter section 20 includes a first bandpass filter 24 and a second bandpass filter 26 coupled in parallel between two switch stages 22, 28. The first bandpass filter 24 is for reception of wideband frequency-hopping spread spectrum signals, and the second bandpass filter 26 is for reception of narrowband signals. It should be appreciated that the bandwidth of the first bandpass filter 24 represents that of a single frequency channel within the wideband frequency range over which frequency-hopping spread spectrum signals are transmitted, and not the bandwidth of the entire wideband frequency range. The switches 22, 28 are controlled by the digital control section 40 (described below), so that the first bandpass filter 24 is enabled during asynchronous communication periods and the second bandpass filter

26 is enabled during synchronous communication periods.

Following the IF filter section 20, the filtered IF signal is provided to the demodulation section 30 which recovers the information contained within the original RF signal. The IF demodulation section 30 comprises an IF amplifier 32, an IF limiter 34, and a demodulator 36. The IF amplifier 32 and IF limiter 34 are used to adjust the signal level of the filtered IF signal to a level sufficient for demodulation. The gain of these stages may be set at different levels depending on whether the received RF signal is a wideband or narrowband signal. The demodulator 36 is adapted to recover both frequency shift key (FSK) modulated signals from a frequency-hopping spread spectrum wideband signal, and frequency modulation (FM) from a synchronous narrowband signal. A single demodulator circuit could be utilized to demodulate both wideband and narrowband signals either by dynamically changing the circuit's quality factor Q, or by accepting a decreased signal to noise ratio for the narrowband signal. Alternatively, separate demodulator circuits could be used for the narrowband and wideband signals that are selectively switched in the same manner as the IF filter section 20.

The digital control section 40 provides the main signal processing hardware for the radio receiver/transmitter, and is responsible for controlling the transmit/receive switching, bandwidth selection, frequency synthesizer programming, clock recovery and data handling/generation. The digital control section 40 comprises a microcontroller 42 and a host interface 44. The microcontroller 42 may be provided by an application specific integrated circuit (ASIC), a microprocessor, a digital signal processor or other such circuit element. The host interface 44 provides for communication between the receiver/transmitter portion of the computing device and a host portion that processes and utilizes the information that has been communicated. As known in the art, the microcontroller 42 performs its functions by executing a series of commands or instructions, also referred to

as a software program, that may be disposed on a permanent storage medium, such as a semiconductor read only memory (ROM) device or a magnetic medium.

The synthesizer section 50 communicates with the digital control section 40 to control the timing and selection of carrier frequencies. The synthesizer section 50 comprises a digital-to-analog (D/A) converter 52, a frequency synthesizer 54, a transmit loop filter 55, a receive loop filter 56, a transmit local oscillator 57, a receive local oscillator 58 and a voltage controlled oscillator 46. The frequency synthesizer 54 is programmed by a plurality of digital data signals from the microcontroller 42, and provides a D.C. voltage signal to the transmit and receive local oscillators 57, 58 that corresponds to a selected frequency. The transmit and receive loop filters 55, 56 comprise low pass filters that remove high frequency noise from the D.C. voltage signals that occurs in the feedback loop. The transmit and receive local oscillators 57, 58 further comprise voltage controlled oscillator (VCO) circuits that receive the D.C. voltage signals, and generate corresponding oscillating signals at the selected frequency. The oscillating signals from the transmit and receive local oscillators 57, 58 are also provided back to the frequency synthesizer 54 as feedback signals, as known in the art.

The oscillating signal from the receive local oscillator 58 is provided to the mixer 18 of the receive section 10 as the frequency-shifted carrier. Digital data from the microcontroller 42 is converted to an analog signal by the D/A converter 52, which is provided to the transmit local oscillator 57 to control the waveshape (i.e., amplitude and frequency) of the oscillating signal. By changing the frequency of the oscillating signal, multiple data rates can be supported. Also, by changing the amplitude of the oscillating signal, the frequency deviation of the transmitted carrier can be changed, allowing modulation of both wideband and narrowband data. The modulated oscillating signal from the transmit local oscillator 57 passes

through a VCO buffer amplifier 59, and is provided to the transmit section 60.

The transmit section 60 essentially reverses the process performed by the receive section 10. The data-modulated, frequency-shifted carrier passes through a bandpass filter 64 to remove any VCO harmonics generated by the synthesizer section 50. Thereafter, the data-modulated, frequency-shifted carrier is provided to a pre-driver 66 and a power amplifier 67 that amplify the carrier signal to a desired output level, and a low pass filter 68 for noise attenuation. Lastly, the amplified carrier signal is provided to the antenna 12 for RF transmission. It should be appreciated that the pre-driver 66 and amplifier 67 stages need not be linear amplifiers due to the constant envelope modulation, thereby making them more efficient than linear counterparts.

The transmit section 60 further includes a D/A converter 62 that modifies the characteristics of the pre-driver 66 and power amplifier 67. The microcontroller 42 calculates a digital offset value for the transmit section 60 based on the frequency generated by the synthesizer section 50, in order to maintain an optimum power output level of the radio receiver/transmitter for each of the shifted frequencies across the wideband frequency range. The digital offset value is provided to the D/A converter, which provides an analog control signal to bias the pre-driver 66 and power amplifier 67. An example of an RF transmitter that maintains power output level linearity across a range of transmitting frequencies is disclosed in Serial Number 08/823,611 for ADAPTIVE POWER LEVELING OF AN RF TRANSCEIVER UTILIZING INFORMATION STORED IN NON-VOLATILE MEMORY, filed March 25, 1997, by the assignee herein.

Fig. 3 illustrates an alternative embodiment of the multi-mode RF receiver/transmitter in the multi-mode computing device 6 which is adapted to communicate both narrowband RF signals and wideband direct sequence spread spectrum RF signals. The multi-mode RF receiver/transmitter of Fig. 3 includes an RF receive section 10, a

demodulation section 70, a digital control section 40, a synthesizer section 80 and a transmit section 60. The RF receive section 10, digital control section 40 and transmit section 60 of Fig. 3 are substantially the same as the corresponding sections of the multi-mode RF receiver/transmitter of Fig. 2, and further description of these sections is therefore omitted.

Following the RF receive section 10, the IF signal is provided to the demodulation section 70 which recovers the information contained within the original RF signal. The demodulation section 70 comprises a bandpass filter 72, an IF amplifier 73, an IF limiter 74, a demodulator 76, and a narrowband and a wideband data low pass filter 77, 78. The bandpass filter 72 has a bandwidth sufficient for reception of wideband direct sequence spread spectrum signals. The IF amplifier 73 and IF limiter 74 are used to adjust the signal level of the filtered IF signal to a level sufficient for demodulation. As in the previous embodiment, the gain of these stages may be set at different levels depending on whether the received RF signal is a wideband or narrowband signal.

The demodulator 76 is adapted to recover binary phase shift key (BPSK) modulated signals from a direct sequence spread spectrum wideband signal and frequency modulation (FM) from a synchronous narrowband signal. The demodulator 76 may further comprise a conventional QPSK demodulator circuit which provides an in phase (I) output and a quadrature (Q) output. By modulating the direct sequence spread spectrum data using BPSK modulation, the Q channel output provides the demodulated BPSK data through the associated wideband filter 78 and the I channel output provides the demodulated FM signal through the associated narrowband filter 77. This way, a single demodulator circuit could be utilized to demodulate both wideband and narrowband signals without having to switch filters as in the previous embodiment.

The synthesizer section 80 communicates with the digital control section 40 to control the timing and selection of carrier frequencies.

On the receive side, the synthesizer section 80 comprises a frequency synthesizer 82, a receive loop filter 83 and a receive local oscillator 84. As in the previous embodiment, the frequency synthesizer 82 is programmed by a plurality of digital data signals from the microcontroller 42, and provides a D.C. voltage signal to the receive local oscillator 84 that corresponds to a selected frequency. The oscillating signal from the receive local oscillator 84 is provided back to the frequency synthesizer 82 as a feedback signal, and the receive loop filter 87 comprises a low pass filter that removes high frequency noise from the D.C. voltage signal that occurs in the feedback loop.

On the transmit side, the synthesizer section further comprises a transmit loop filter 87, a transmit local oscillator 89, an I-channel data low pass filter 85, a Q-channel data low pass filter 88, an I-channel mixer 86, a Q-channel mixer 91, a phase shift circuit 92 and a summing circuit 94. The frequency synthesizer 82 provides a D.C. voltage signal to the transmit local oscillator 89 to provide an oscillating signal, which is in turn provided back to the frequency synthesizer as a feedback signal. The oscillating signal from the transmit local oscillator 89 is provided to the phase shift circuit 92, which provides the oscillating signal to the I-channel mixer 86 and shifts the phase of the oscillating signal by 90° and provides the phase-shifted oscillating signal to the Q-channel mixer 91. I-channel data (i.e., narrowband data) and Q-channel data (i.e., wideband data) generated by the digital control section 40 is provided through the respective filters 85, 88 to the respective mixers 86, 91. The Q-channel data low pass filter 88 has a wider bandwidth than the I-channel data low pass filter 85 with a frequency cutoff consistent with the required direct sequence spread spectrum data format. The mixers 86, 91 modulate the I and Q-channel data with the respective oscillating signals, and these modulated data signals are summed by the summing device 94. Lastly, the modulated oscillating signal from the summing device 94 passes through a VCO buffer amplifier 96, and is provided to the transmit section 60.

In the wideband mode (i.e., direct sequence spread spectrum communication), the receiver/transmitter operates as an ordinary direct sequence spread spectrum radio. The digital control section 40 controls the transmit and receive operation, using data from the wideband filter 78, programs the synthesizer 82 for the desired channel frequency, and outputs the proper spreading sequence data to the synthesizer section 80 for transmit on the Q-channel. In the narrowband mode, the operation is the same, except that at the time interval defined by the beacon signal the receiver/transmitter is placed in the narrowband mode. The digital control section 40 selects the data from the narrowband filter 77 for reception of narrowband data. When transmitting, the digital control section 40 outputs data of a lower data rate onto the I-channel only, creating a signal of narrower bandwidth than the direct sequence spread spectrum signal.

Having thus described a preferred embodiment of a multi-mode radio frequency network, it should be apparent to those skilled in the art that certain advantages have been achieved. It should also be appreciated that various modifications, adaptations, and alternative embodiments thereof may be made within the scope and spirit of the present invention. The invention is solely defined by the following claims.

CLAIMSWhat is Claimed is:

- 5 1. A multi-mode radio frequency network, comprising:
 at least one first type of computing device having a first radio
 receiver/transmitter adapted for communication over a narrowband
 frequency range;
 at least one second type of computing device having a second
10 radio receiver/transmitter adapted for communication over both said
 narrowband frequency range and a wideband frequency range; and
 a network access controller adapted for communication with
 said at least one first type of computing device and said at least one second
 type of computing device over respective ones of said narrowband and said
15 wideband frequency ranges, said network access controller providing
 synchronization signals for coordinating timing of communications over said
 narrowband and said wideband frequency ranges.
2. The multi-mode radio frequency network of Claim 1,
20 wherein said second radio receiver/transmitter provides spread spectrum
 communication signals over said wideband frequency range.
3. The multi-mode radio frequency network of Claim 2,
 wherein said spread spectrum communication signals further comprise
25 frequency-hopping spread spectrum signals.
4. The multi-mode radio frequency network of Claim 2,
 wherein said spread spectrum communication signals further comprise direct
 sequence spread spectrum signals.

5. The multi-mode radio frequency network of Claim 1, wherein said wideband frequency range communications occur in a substantially asynchronous manner.

5 6. The multi-mode radio frequency network of Claim 1, wherein said narrowband frequency range communications occur in a substantially synchronous manner.

10 7. The multi-mode radio frequency network of Claim 1, further comprising at least one data storage/retrieval device adapted for communication with each of said at least one first type of computing device and said at least one second type of computing device over said narrowband frequency range.

15 8. The multi-mode radio frequency network of Claim 1, further comprising at least one data collection device adapted for communication with said at least one first type of computing device and said at least one second type of computing device over said narrowband frequency range.

20 9. The multi-mode radio frequency network of Claim 1, wherein said synchronization signals further comprise periodic beacon signals.

25 10. The multi-mode radio frequency network of Claim 9, wherein said periodic beacon signals define respective discrete time periods which further include a synchronous portion and an asynchronous portion.

30 11. The multi-mode radio frequency network of Claim 1, wherein said second radio receiver/transmitter further comprises an

intermediate frequency portion having a wideband filter, a narrowband filter, and means for switching between said wideband and narrowband filters based upon said synchronization signals.

5 12. The multi-mode radio frequency network of Claim 1, wherein said second radio receiver/transmitter further comprises:

 a receive section adapted to receive radio frequency (RF) signals over said wideband and said narrowband frequency ranges and having a downconversion mixer to mix the RF signals with a frequency-shifted carrier
10 signal to downconvert the RF signals to intermediate frequency (IF) signals;

 an IF filter section adapted to receive said IF signals and having a wideband bandpass filter and a narrowband bandpass filter that are alternatively coupled to said IF signals to provide filtered IF signals;

 a demodulation section adapted to receive said filtered IF
15 signals and recover wideband and narrowband receive signals therefrom;

 a synthesizer section adapted to generate said frequency-shifted carrier for said receive section, said frequency-shifted carrier being further modulated by wideband and narrowband transmit data signals to provide modulated transmit signals; and

20 a transmit section adapted to transmit said modulated transmit signals.

 13. The multi-mode radio frequency network of Claim 12, further comprising a control section adapted to select between said
25 wideband bandpass filter and said narrowband bandpass filter.

 14. The multi-mode radio frequency network of Claim 1, wherein said second radio receiver/transmitter further comprises:

 a receive section adapted to receive radio frequency (RF)
30 signals and having a downconversion mixer to mix the RF signals with a

carrier signal to downconvert the RF signals to intermediate frequency (IF) signals;

a demodulation section adapted to receive said filtered IF signals and provide in-phase and quadrature receive data signals therefrom;

5 a synthesizer section adapted to generate said carrier for said receive section, said carrier being further modulated by in-phase and quadrature transmit data signals;

a transmit section adapted to transmit said modulated transmit signals; and

10 a control section adapted to control switching between wideband and narrowband modes of said second radio receiver/transmitter, wherein said in-phase and quadrature receive signals comprise wideband data in said wideband mode of said second radio receiver/transmitter, and said in-phase receive signals comprising narrowband data in said
15 narrowband mode of said second radio receiver/transmitter.

15. The multi-mode radio frequency network of Claim 14, wherein said demodulation section further comprises a demodulator adapted to recover frequency modulation (FM) from said narrowband data and
20 quadrature phase shift key (QPSK) modulation from said wideband data.

16. The multi-mode radio frequency network of Claim 14, wherein said wideband data further comprises direct sequence spread spectrum data.
25

17. An apparatus for communicating in both narrowband and wideband frequency ranges comprising:

a receive section adapted to receive radio frequency (RF) signals and having a downconversion mixer to mix the RF signals with a
30 frequency-shifted carrier signal to downconvert the RF signals to

intermediate frequency (IF) signals;

an IF filter section adapted to receive said IF signals and having a wideband bandpass filter and a narrowband bandpass filter that are alternatively coupled to said IF signals to provide filtered IF signals;

5 a demodulation section adapted to receive said filtered IF signals and recover wideband and narrowband receive signals therefrom;

a synthesizer section adapted to generate said frequency-shifted carrier for said receive section, said frequency-shifted carrier being further modulated by wideband and narrowband transmit data signals to
10 provide modulated transmit signals; and

a transmit section adapted to transmit said modulated transmit signals.

18. The apparatus of Claim 17, wherein said demodulation
15 section further comprises a demodulator adapted to recover frequency modulation (FM) from said narrowband signals and frequency shift key (FSK) modulation from said wideband signals.

19. An apparatus for communicating in both narrowband
20 and wideband frequency ranges comprising:

a receive section adapted to receive radio frequency (RF) signals and having a downconversion mixer to mix the RF signals with a carrier signal to downconvert the RF signals to intermediate frequency (IF) signals;

25 a demodulation section adapted to receive said filtered IF signals and provide in-phase and quadrature receive data signals therefrom;

a synthesizer section adapted to generate said carrier for said receive section, said carrier being further modulated by in-phase and quadrature transmit data signals;

a transmit section adapted to transmit said modulated transmit signals; and

5 a control section adapted to control switching between wideband and narrowband modes of said apparatus, wherein said in-phase and quadrature receive signals comprise wideband data in said wideband mode of the apparatus, and said in-phase receive signals comprising narrowband data in said narrowband mode of the apparatus.

20. The apparatus of Claim 19, wherein said demodulation
10 section further comprises a demodulator adapted to recover frequency modulation (FM) from said narrowband data and quadrature phase shift key (QPSK) modulation from said wideband data.

21. The apparatus of Claim 19, wherein said wideband data
15 further comprises direct sequence spread spectrum data.

1/3

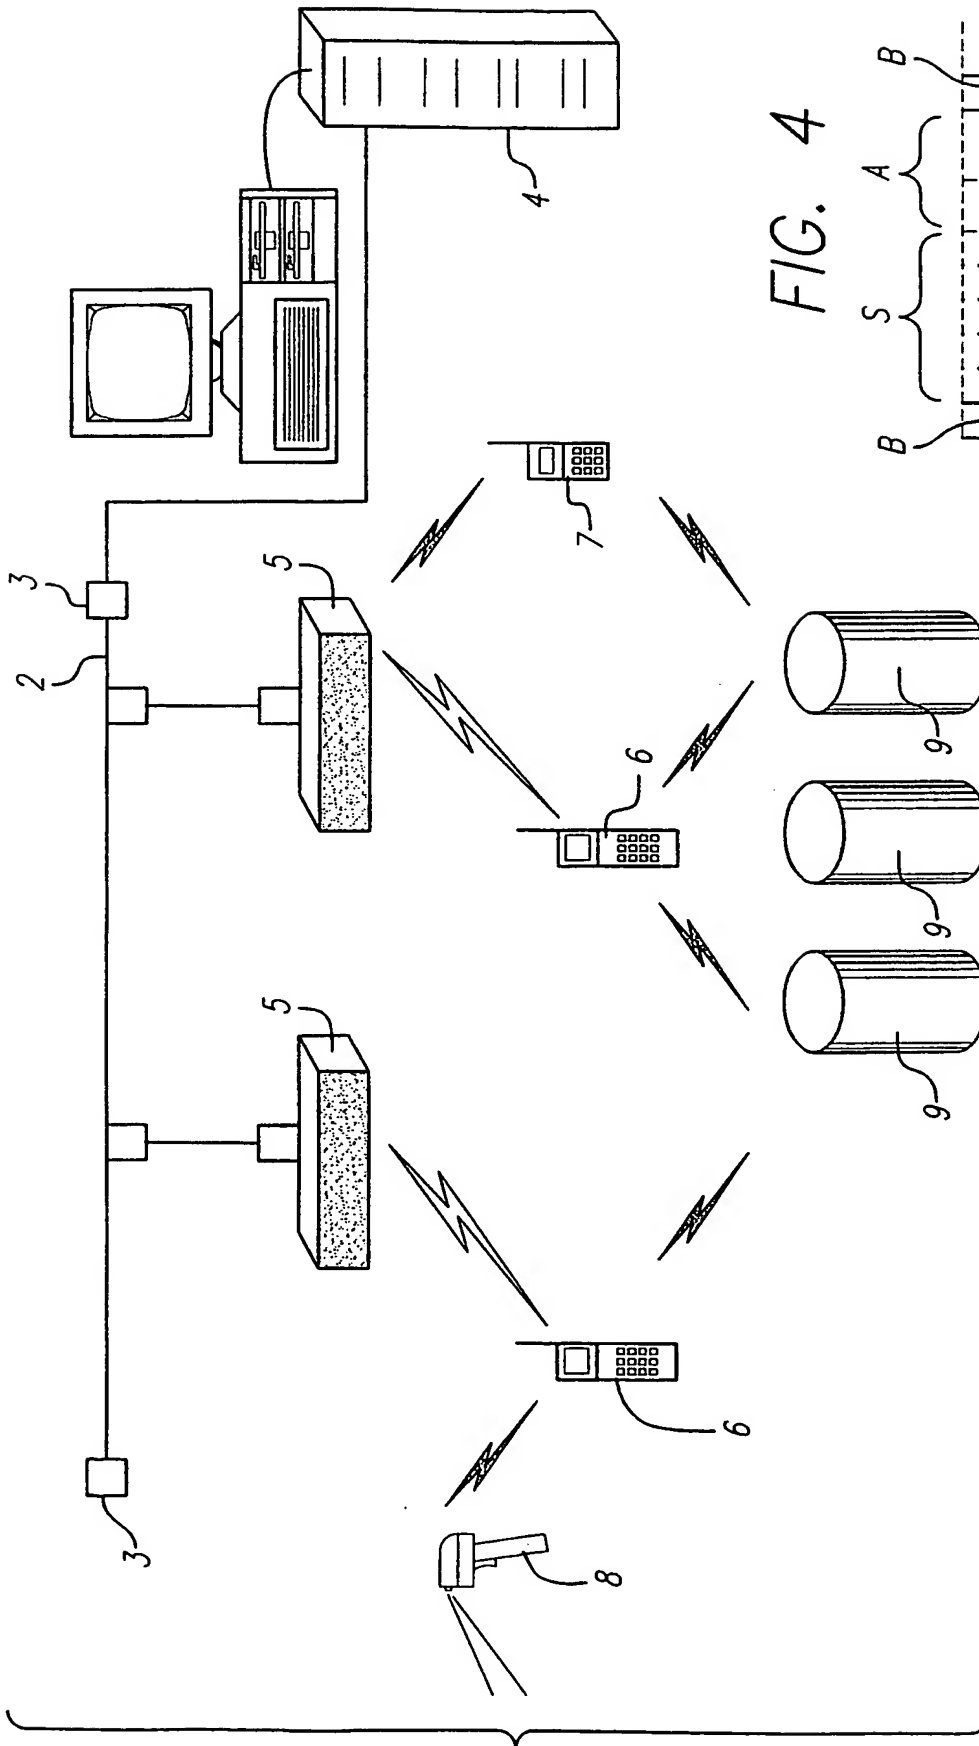


FIG. 1

FIG. 4

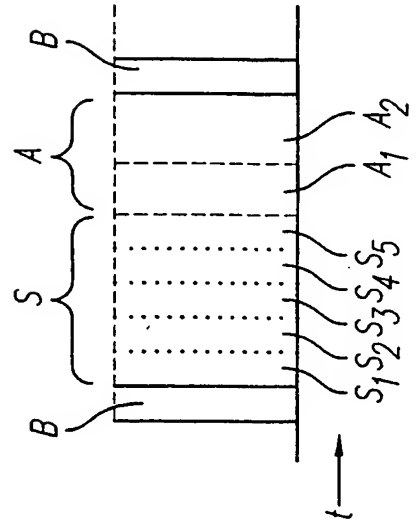


FIG. 2


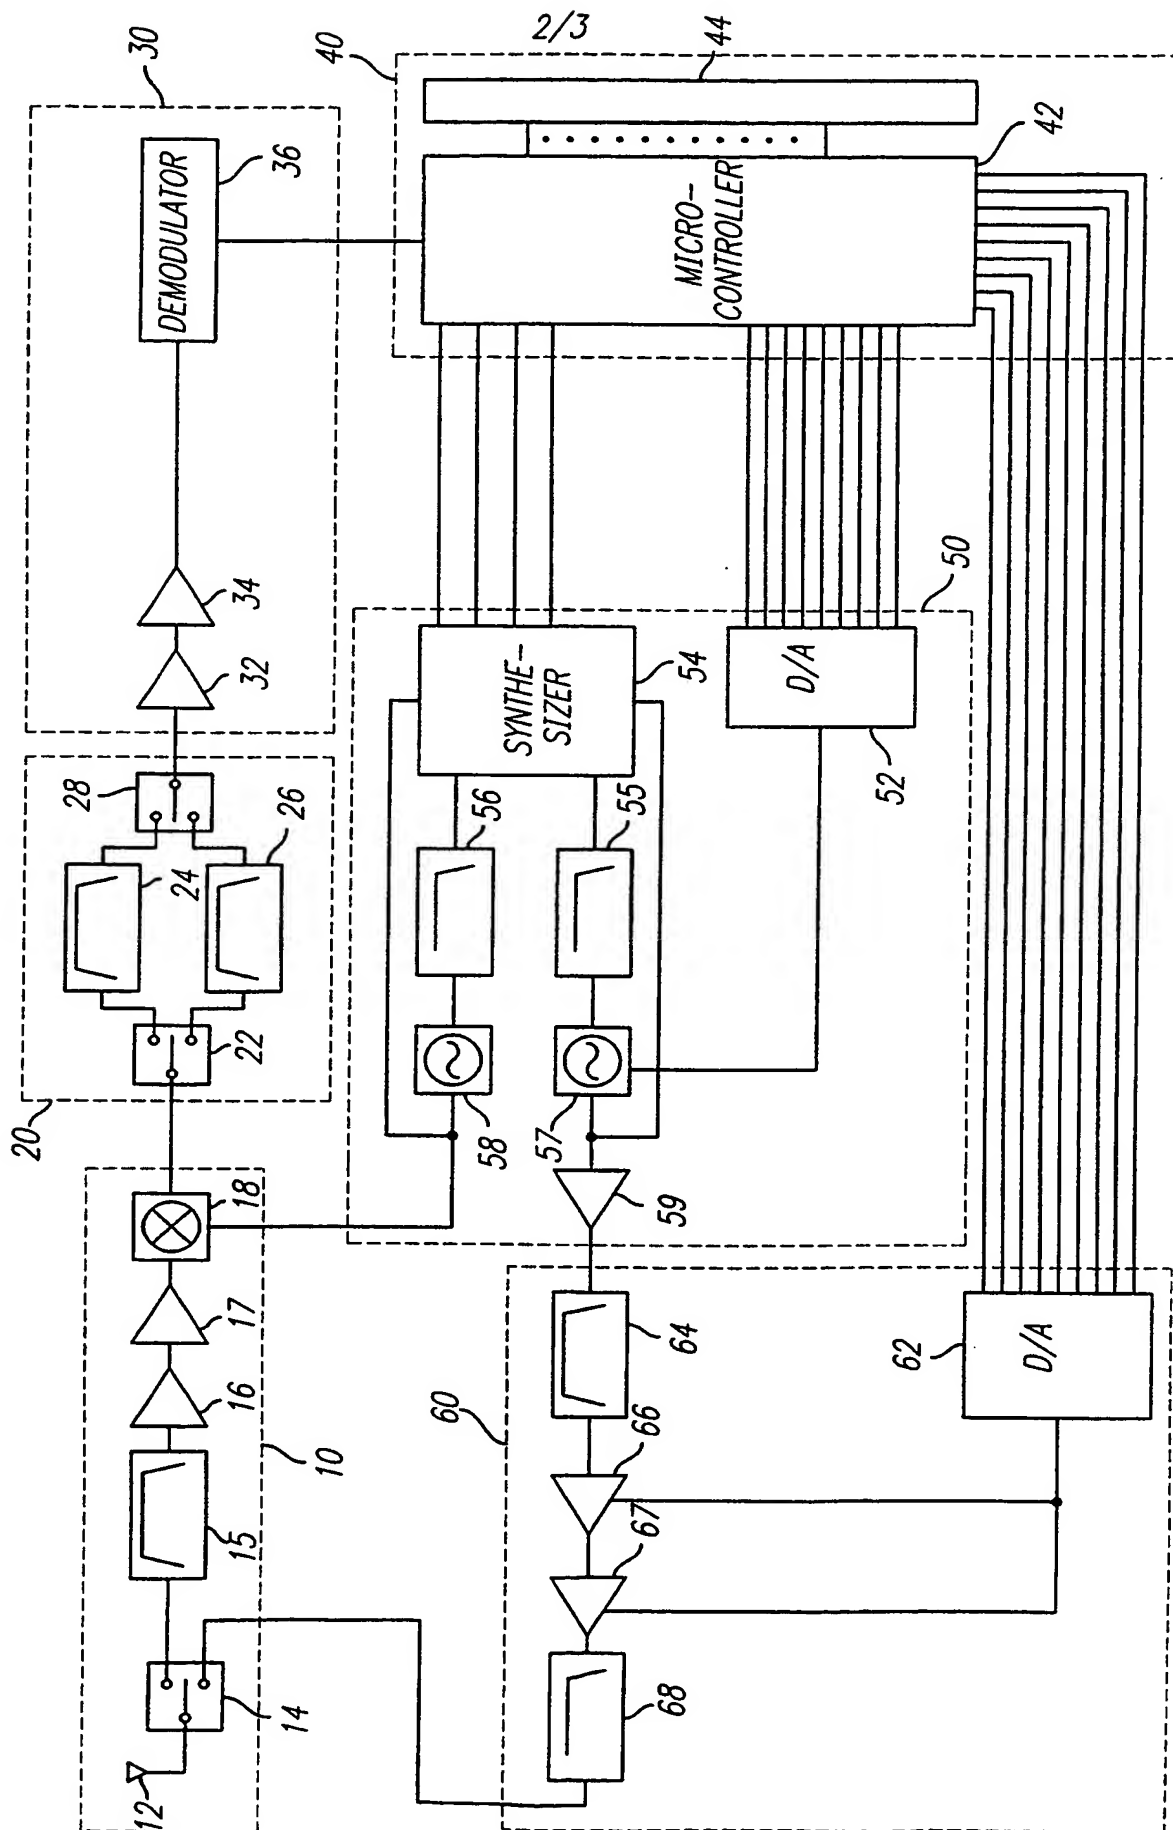


FIG. 3

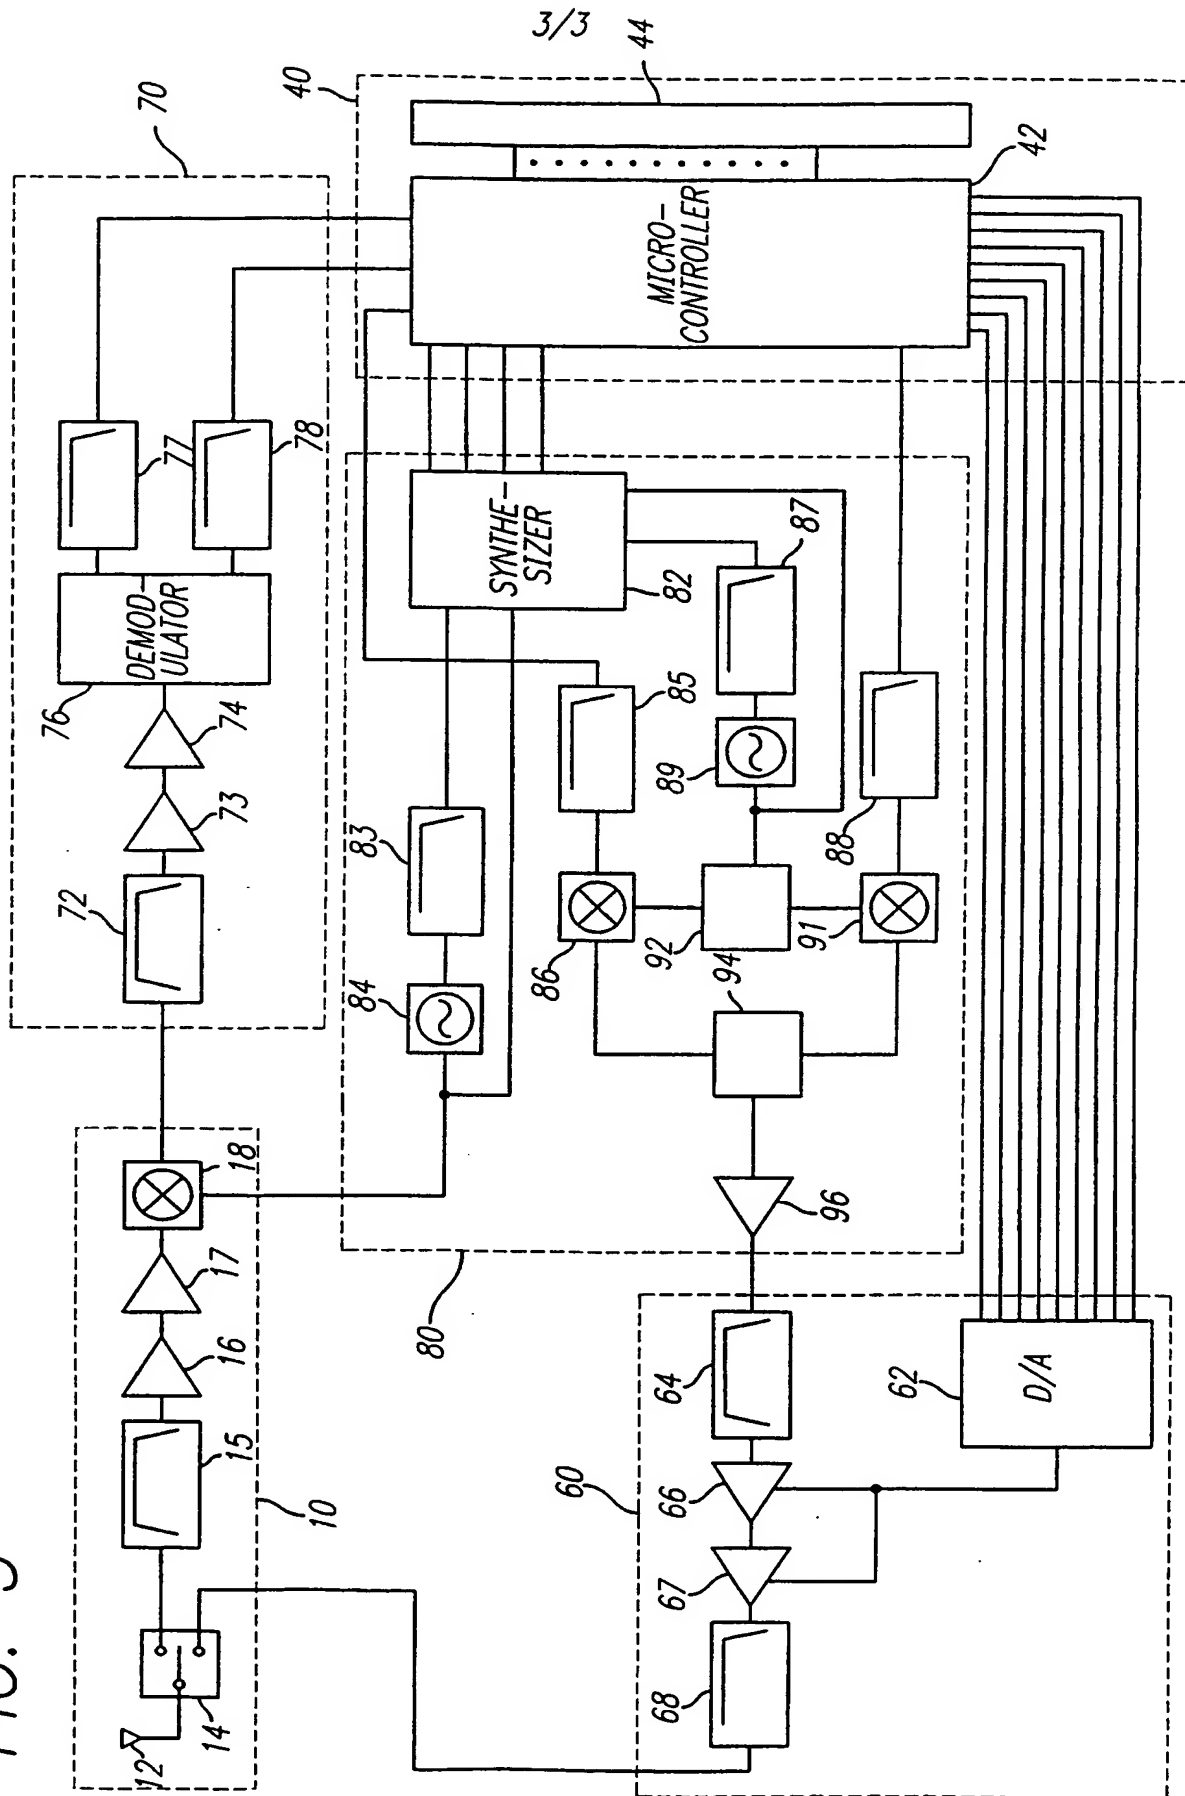

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 98/22969

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 6 H04L12/28 H04B1/69

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04L H04Q H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 291 516 A (DIXON ROBERT C ET AL) 1 March 1994 see column 1, line 60 - column 3, line 30 see column 4, line 57 - column 8, line 14 see claims 1,4-6	1,4, 11-14, 16,17, 19,21
A	WO 97 32403 A (ERICSSON GE MOBILE INC) 4 September 1997 see abstract see page 2, line 5 - page 5, line 14 see page 6, line 23 - page 7, line 2 see page 11, line 22 - page 12, line 13 see claims 1,10 --- -/--	1,11-13

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

19 February 1999

Date of mailing of the international search report

02/03/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040. Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Karavassilis, N

INTERNATIONAL SEARCH REPORT

Internat	Application No
PCT/US 98/22969	

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 022 046 A (MORROW JR ROBERT K) 4 June 1991 see abstract see column 5, line 30 - column 6, line 9 see claim 1 <div style="text-align: center;">----</div>	1, 4, 17, 19
A	SKELLERN D J ET AL: "A HIGH-SPEED WIRELESS LAN" IEEE MICRO, vol. 17, no. 1, January 1997, pages 40-47, XP000642695 see page 43, left-hand column, line 1 - line 31; figure 4 <div style="text-align: center;">----</div>	14, 17, 19
A	BANTZ D F ET AL: "WIRELESS LAN DESIGN ALTERNATIVES" IEEE NETWORK: THE MAGAZINE OF COMPUTER COMMUNICATIONS, vol. 8, no. 2, 1 March 1994, pages 43-53, XP000515079 see page 46, left-hand column, line 35 - page 47, left-hand column, line 46 <div style="text-align: center;">-----</div>	2-4, 16, 21

INTERNATIONAL SEARCH REPORT

Information on patent family members

Internat I Application No

PCT/US 98/22969

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5291516 A	01-03-1994	US 5694414 A	02-12-1997
		US 5790587 A	04-08-1998
		US 5796772 A	18-08-1998
		US 5815525 A	29-09-1998
		AU 2140092 A	30-12-1992
		CA 2102914 A	14-11-1992
		EP 0584248 A	02-03-1994
		JP 2846118 B	13-01-1999
		JP 6507768 T	01-09-1994
		WO 9221195 A	26-11-1992
WO 9732403 A	04-09-1997	AU 5419196 A	16-09-1997
		EP 0883934 A	16-12-1998
US 5022046 A	04-06-1991	NONE	

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USTO)